

Voltage protector

● Technical data


Rated supply voltage	AC220V
Operation voltage range	AC 80V–400V(single
Rated frequency	phase) 50/60Hz
Electric current(>A)setting range	1–63A
Overtoltage(>U)setting range	230–300V
Undervoltage(<U)setting range	140–210V
Error	2%
>Uand<Utrip delay	0.5S
Reset/start delay	1s–600s
Voltage measurement accuracy	1%(No1 exceeding 1% of the overall range
Rated insulation voltage	400V
Output contact	1NO
Electrical life	10 ⁵
Mechanical life	10 ⁶
Protection degree	IP20
Pollution degree	3
Altitude	≤2000m
Operatintg temp erature	-50°C~55°C
Humidity	≤50%at40°C(without condensation)
Storage temperature	-30°C–70°C



● Default setting

Technical param eter	Setting range	Step	Factory setting
Overtoltage trip value	230-300V	1V	280V
Undervoltage trip value	140~210V	1V	160V
Overcurrent trip value	1~63A	1A	20A
Reset/start delay	1s~600s	1s	5s

Current specificaton	15A	25A	32A	50A	63A
Rated op erating cueernt(In.A)	15	25	32	50	63
Maximum operating current I _{max} (A,within 10min)	25	30	40	60	80
Max.power ofload(kW)	3.6	5.5	7	11	13.9

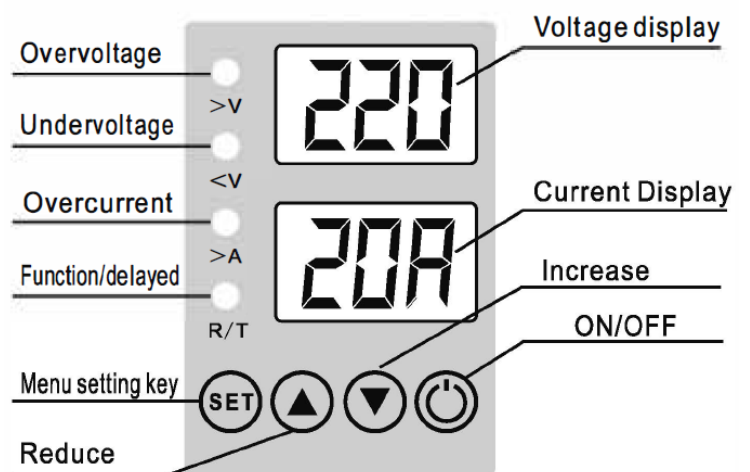


* For more information, please contact LEADER GROUP sales team: info@leadergroup-cn.com




Voltage protector

● Function setting

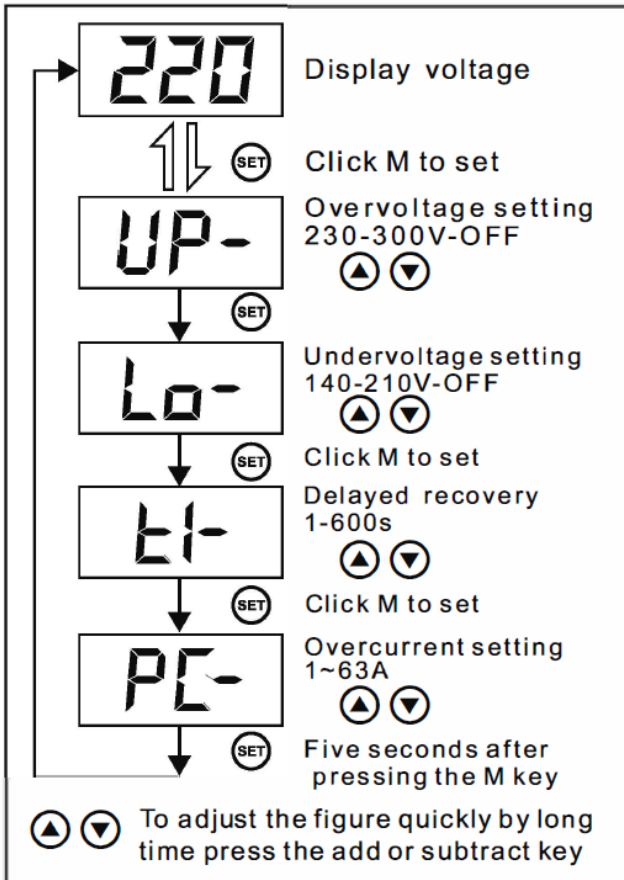

● Wiring and shape dimensions

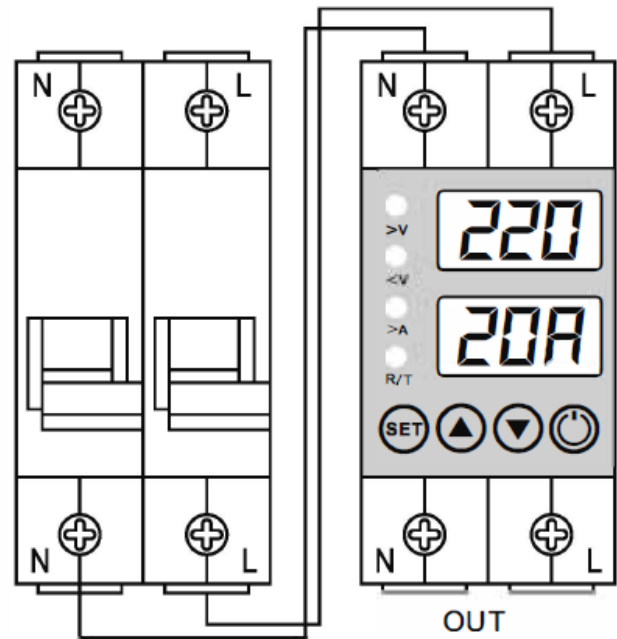

外形尺寸 Dimensions

